


INSTRUCTIONS

Please contact us on **0800 3891420** if you require any further assistance


www.woodblocx.co.uk




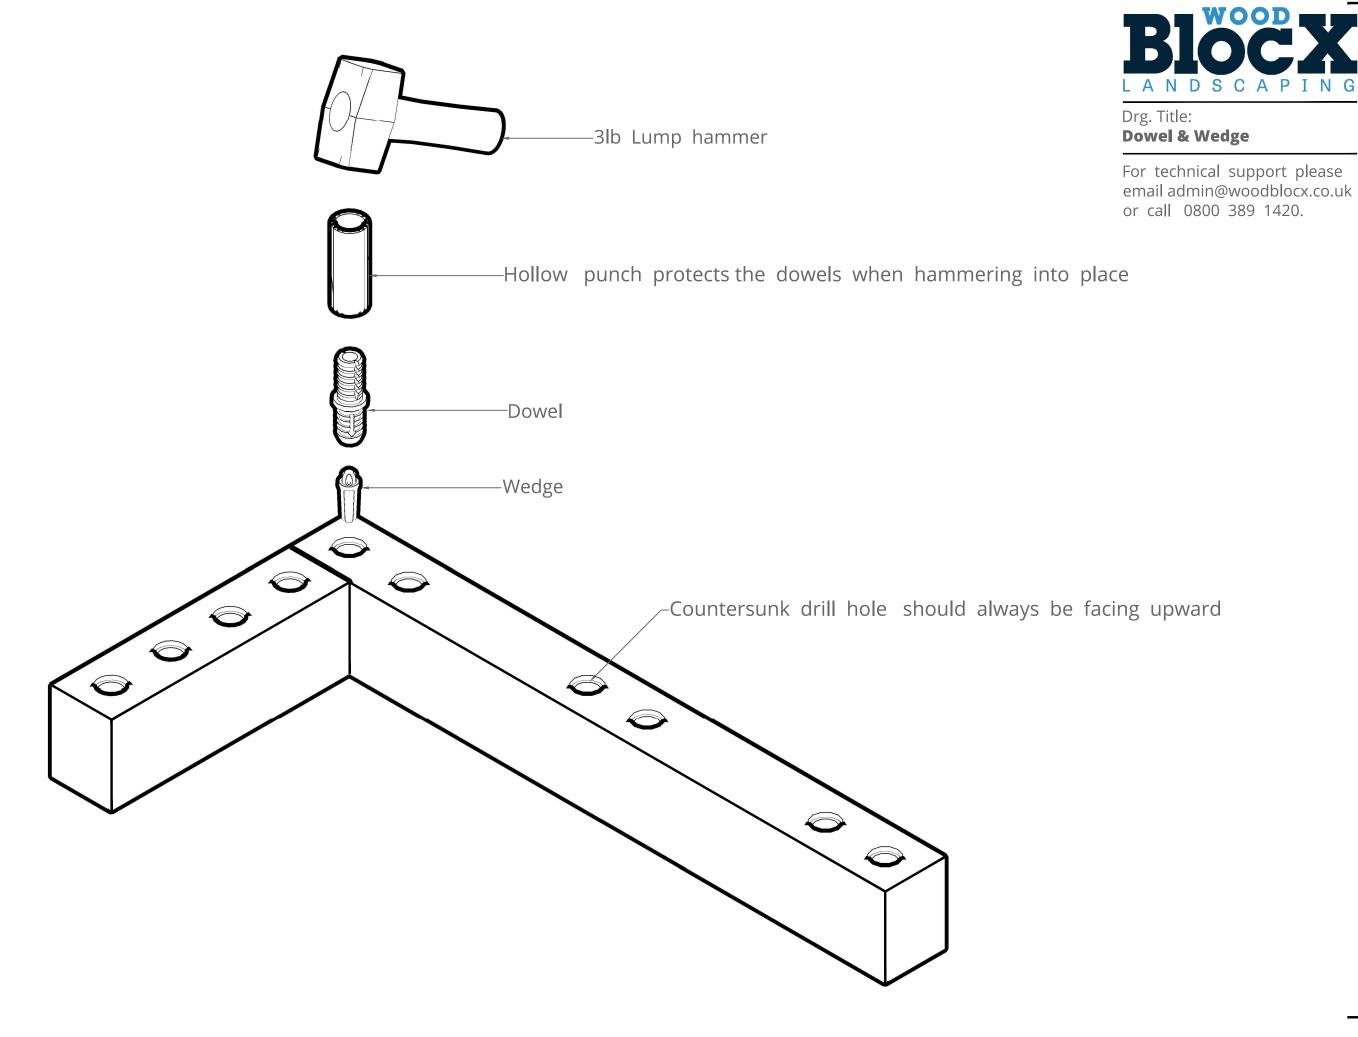



Drg. Title: Levelling

For technical support please

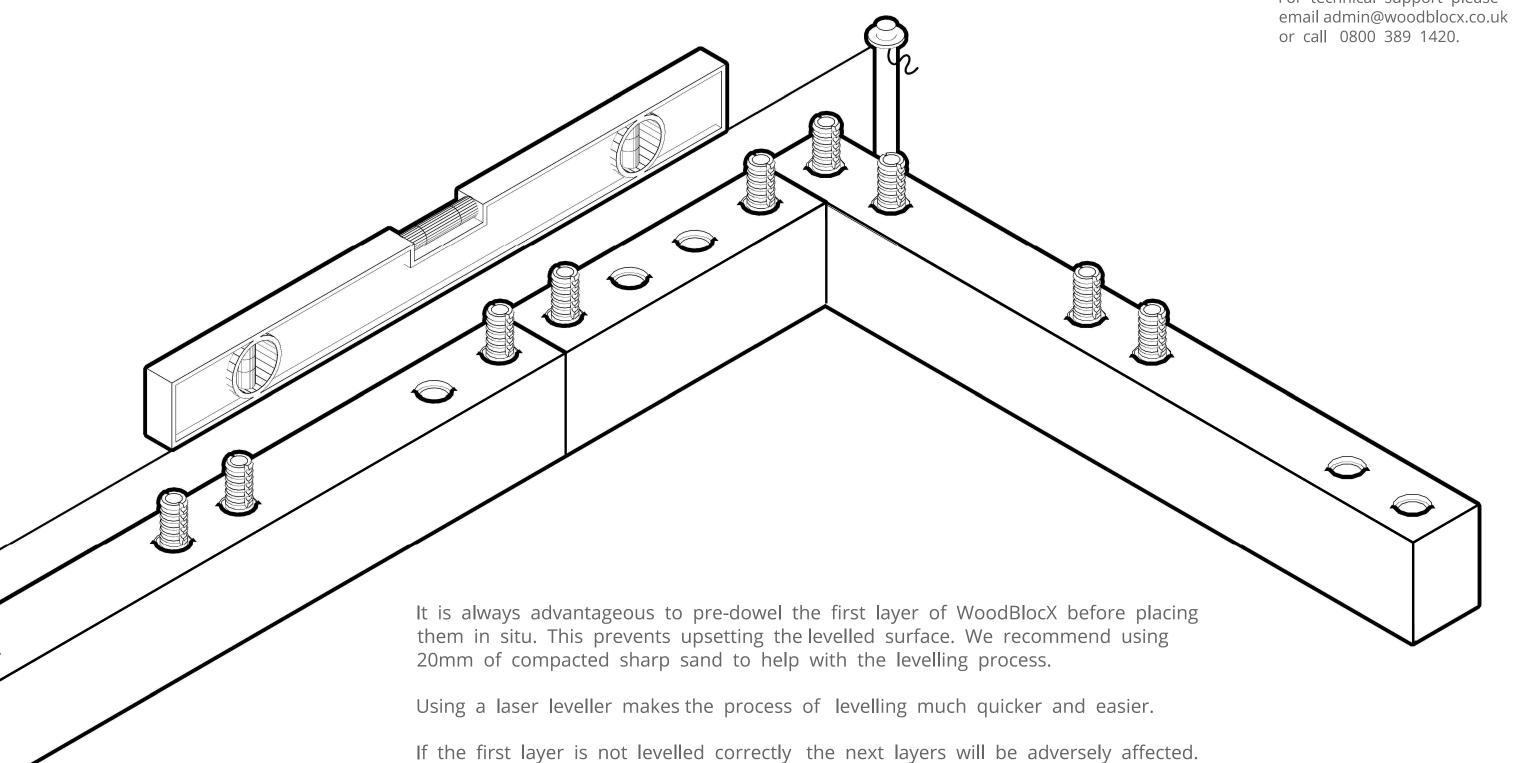

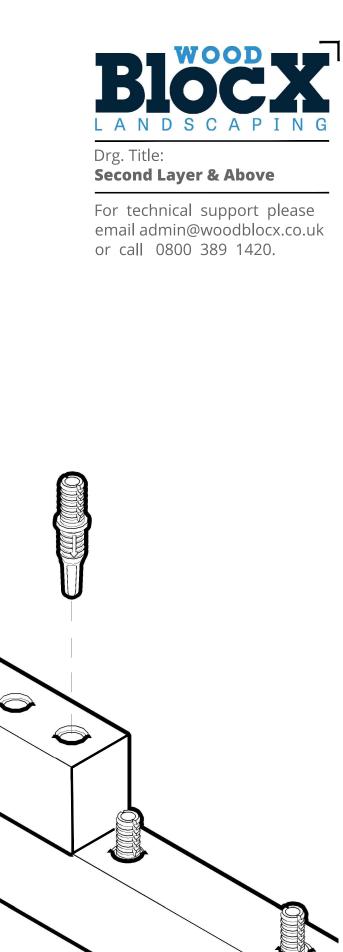

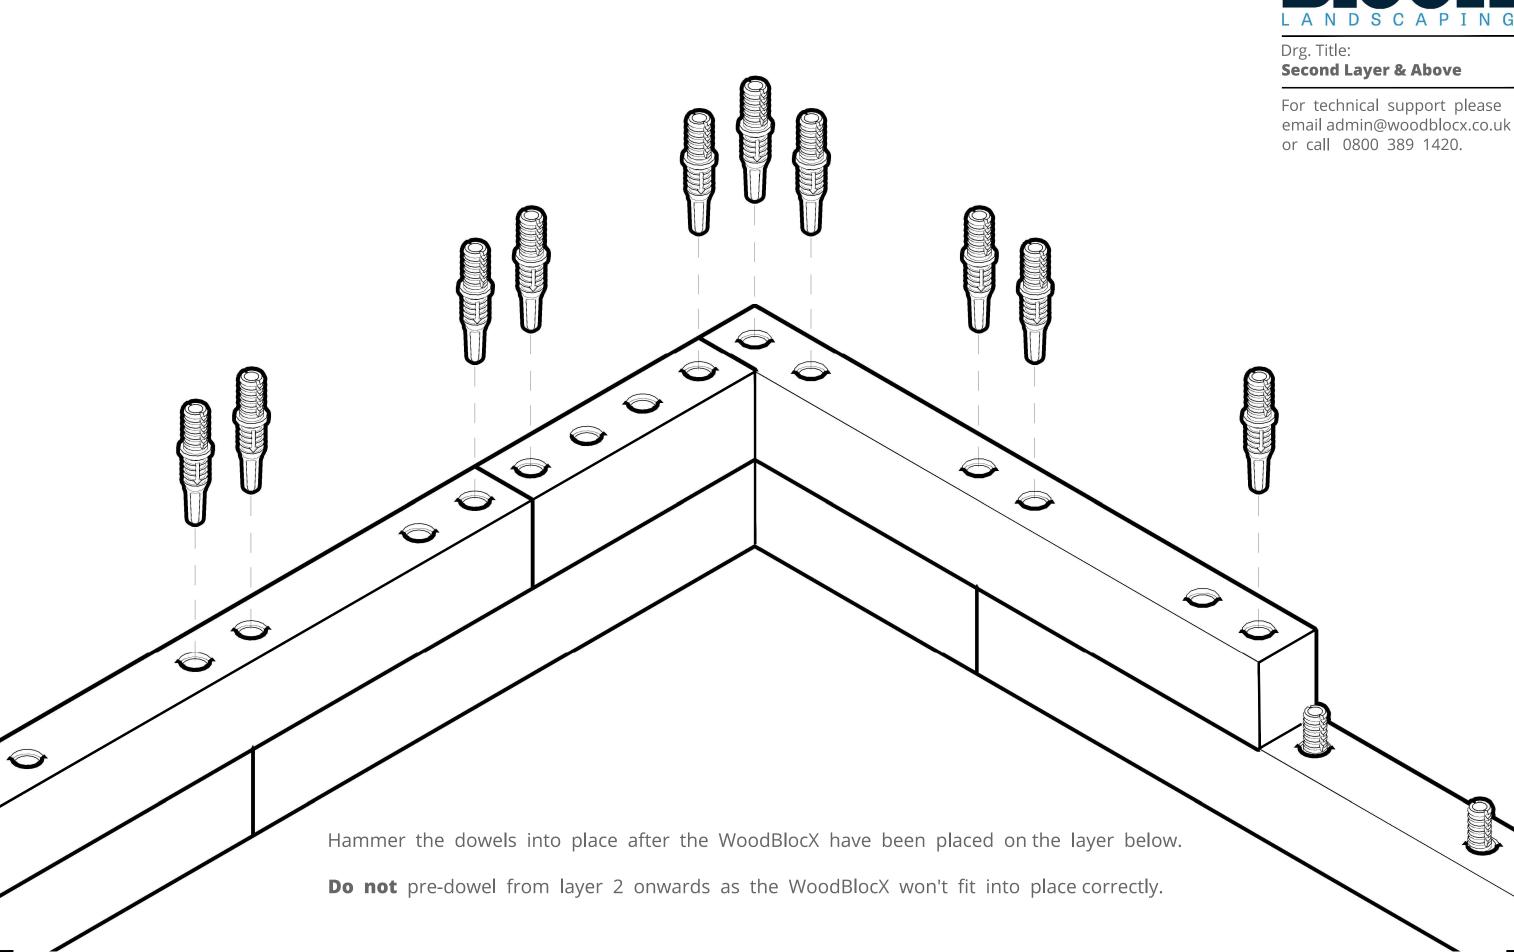

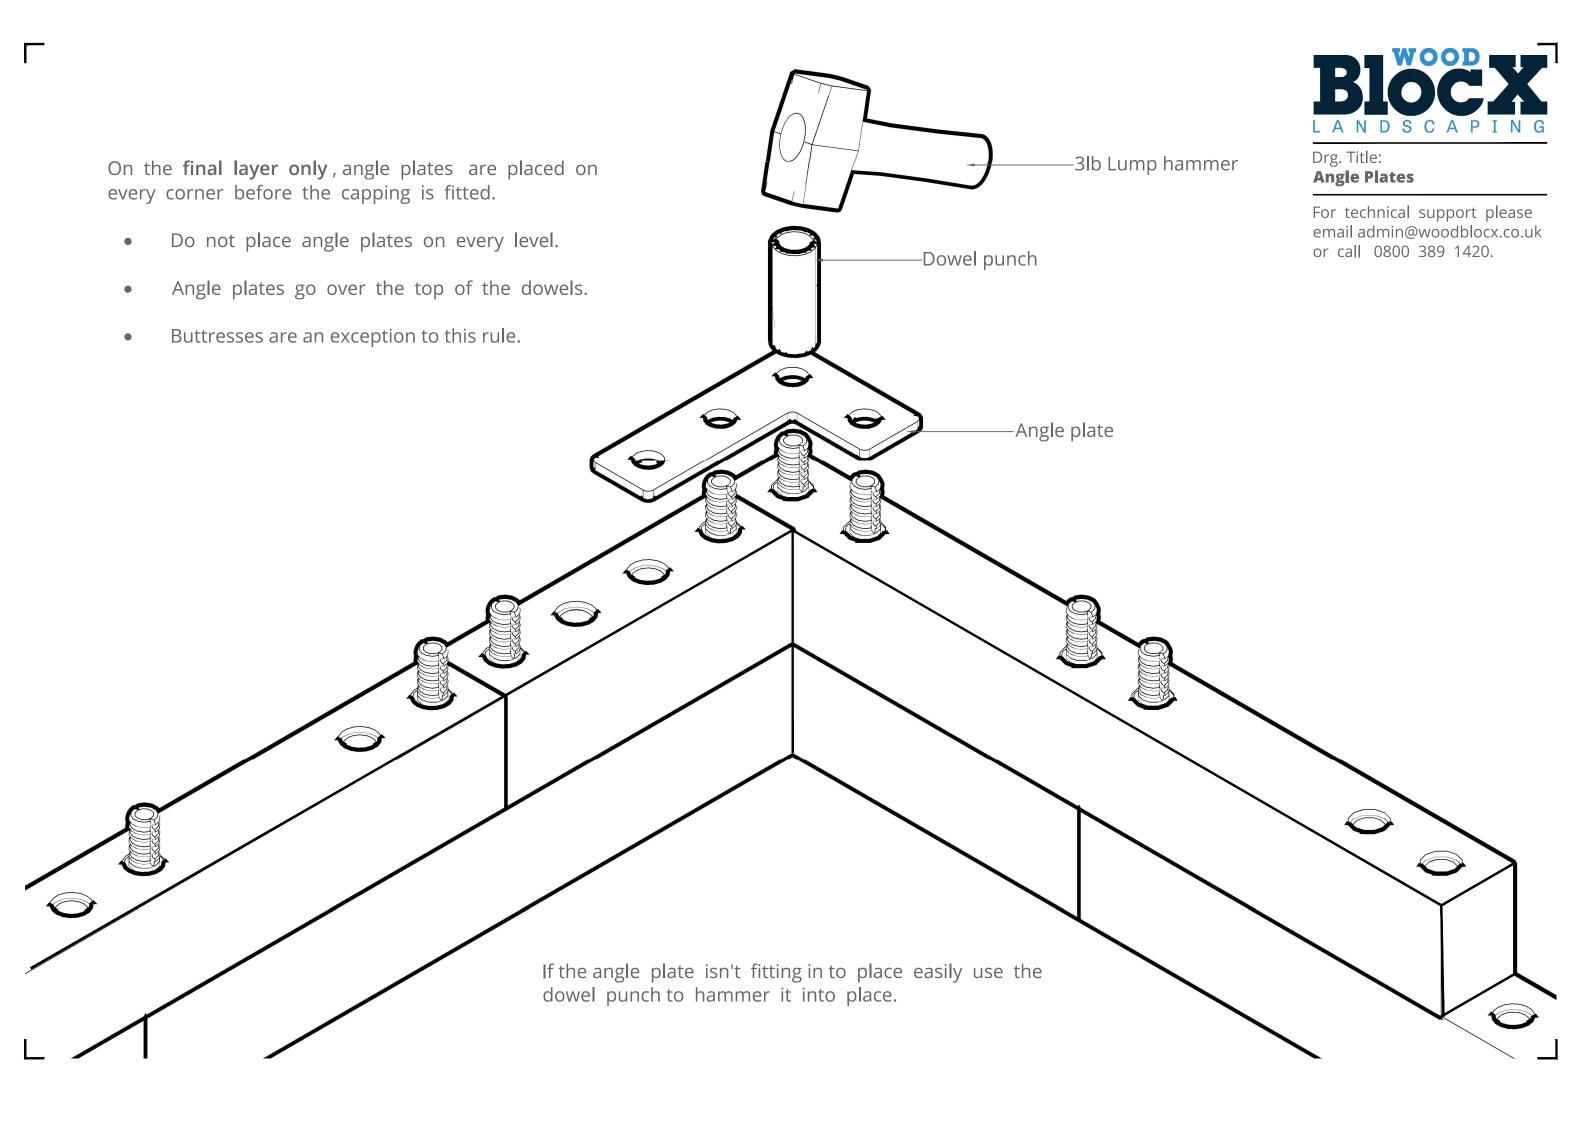




Drg. Title:

Capping Preparation


For technical support please email admin@woodblocx.co.uk or call 0800 389 1420. The dowels on the final layer must be cut to allow for the capping to fit correctly. Dowels can be cut using a handsaw, jigsaw or pipe cutter. Cut the dowel at the third notch from the top.

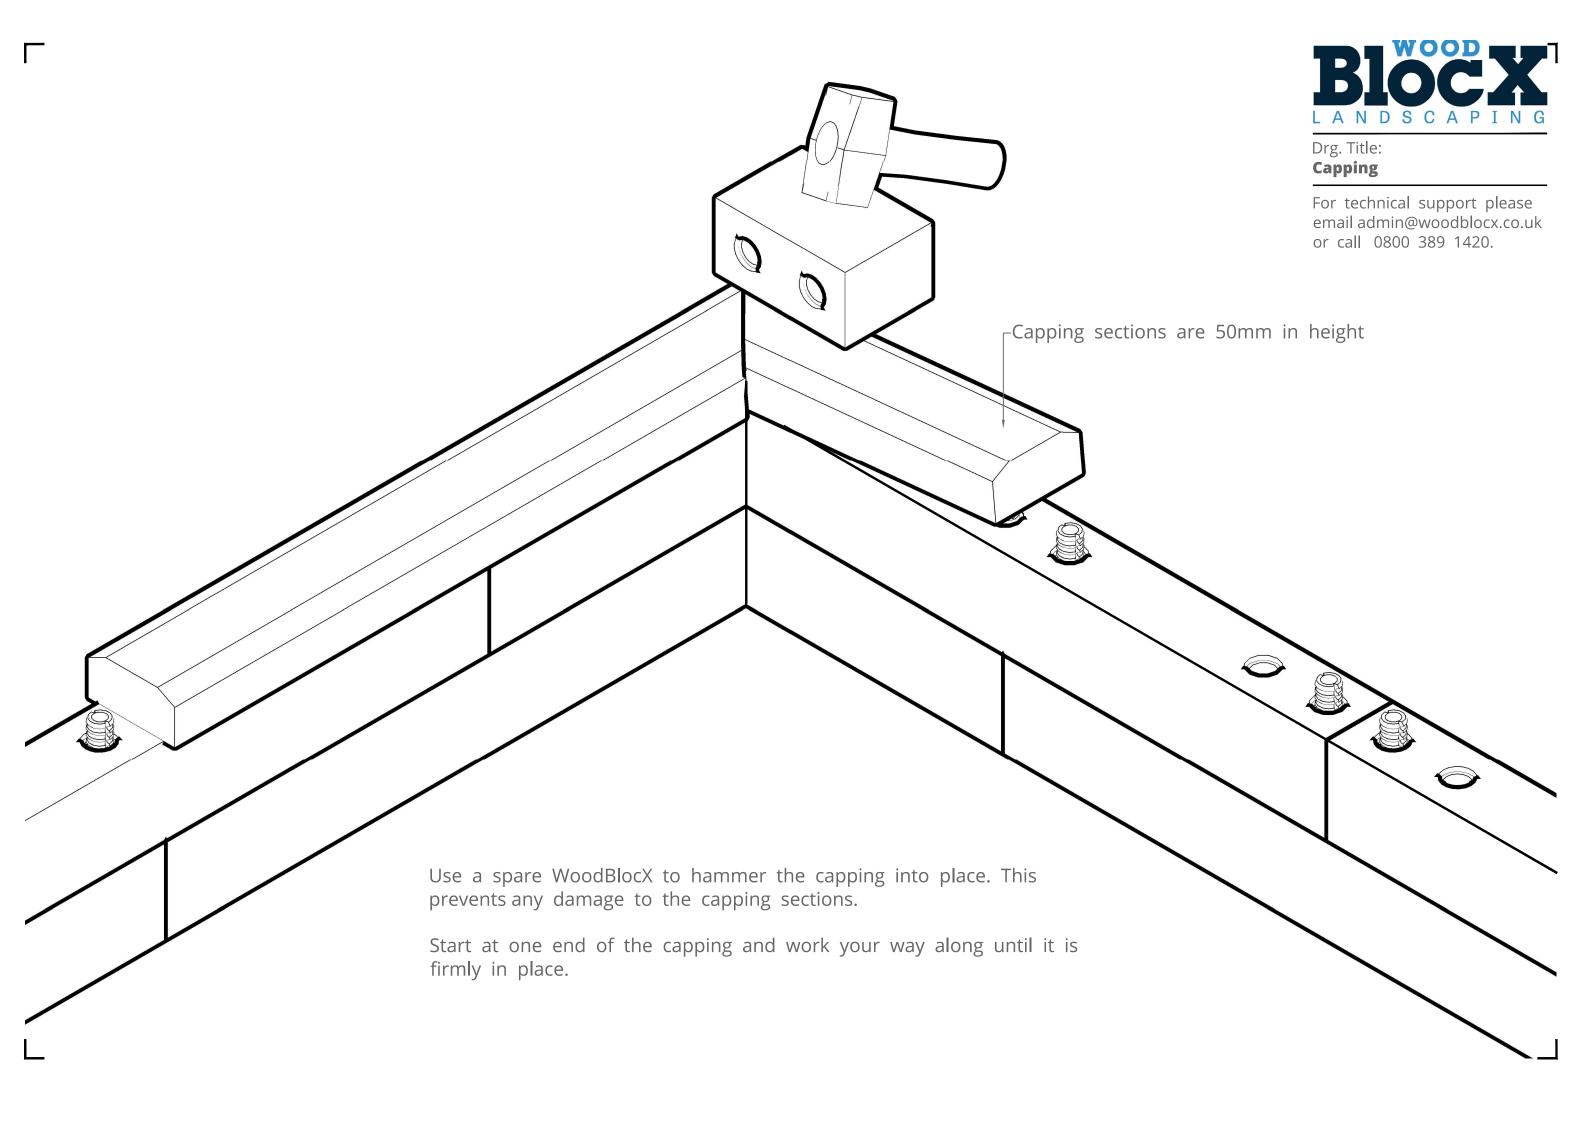



Drg. Title: **Buttress**

For technical support please email admin@woodblocx.co.uk or call 0800 389 1420.

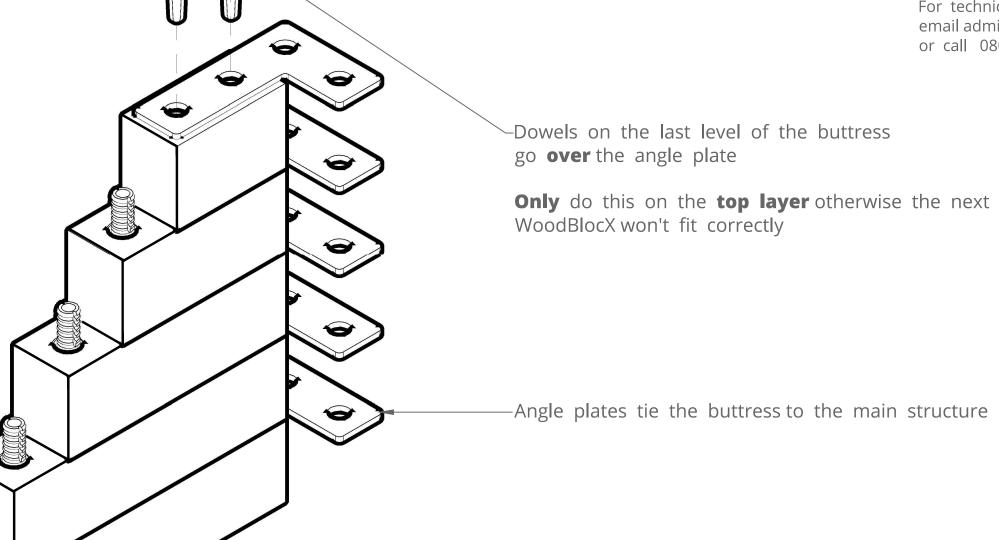

WoodBlocX buttresses act as cantilevers with the weight of soil pushing down on them to keep the main structure supported.

The buttress will always finish one layer below the main height of the structure and are spaced every 1500mm along the wall.



Drg. Title: **Colour Code**

For technical support please email admin@woodblocx.co.uk or call 0800 389 1420.

0 0 0 0 0

BlocX 10 (L 750 x W 75 x H 100 mm)

0 0 0 0 0

BlocX 5 (L 375 x W 75 x H 100 mm)

0 0 0 0

BlocX 4 (L 300 x W 75 x H 100 mm)

0 0 0

BlocX 3 (L 225 x W 75 x H 100 mm)

0 0

BlocX 2 (L 150 x W 75 x H 100 mm)

0 0

Angle BlocX 7° (L 155 x W 75 x H 100 mm)

0 0

Angle BlocX 15° (L 160 x W 75 x H 100 mm)

0 0 0 0

Angle BlocX 45° Long (L 353 x W 75 x H 100 mm)

0000

Angle BlocX 45 °Short (L 322 x W 75 x H 100 mm)